

# ALUMINUM PERSONAL WATERCRAFT TRAILERS



## **WAVE**

- Dual bowed cradle design for a lower launch height
- 5' bunks adjustable to fit small to mid-size personal watercraft
- Keel guard to protect the personal watercraft's hull
- Custom molded wire harness with no splices
- · Bearing lube grease system for long bearing life
- 4 tie down positions to properly secure different sized personal watercraft
- Sealed lights on entire trailer including LED bullet markers
- 60" tongue for best fit in watercraft class size
- Galvanized axle with bearing lube system

#### **H-PACKAGE**

1500 lb axle





### LT SERIES

- Dual bowed cradle design for a lower launch height (single place LT's)
- Long 6' bunks to haul large three seat craft with ease
- Keel guard to protect the personal watercraft's hull
- All welded aluminum tie downs for strong and secure hauling
- Custom molded wire harness with no splices
- Galvanized axle with bearing lube system
- Sealed LED lights on the entire trailer
- Stainless steel hardware upgrade available

#### **ISA BOW STOP**



ISA (Infinite Slide Adjust) bow stop gives a proper fit to any personal watercraft. The winch crank handle can be moved to either side for convenience.






Swivel wheel tongue jack.



Two per machine rear mounted retractable ratchet straps. Standard equipment on the Elite and WC2-2 models.

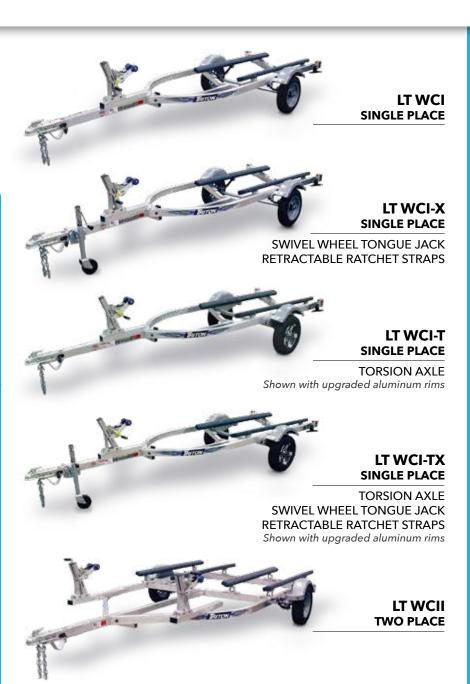

## LT SERIES

continued





### **ELITE SERIES**

- Independent suspension from torsion axle(s) for a smooth ride and low maintenance
- Long 6' bunks to haul large three seat craft with ease
- Bearing lube system built-in hubs for easy maintenance and long bearing life, Reliable brand bearing lube system used on Elite WCIV and WC2-2
- All stainless steel hardware, great for salt water use
- Longer tongue & wider frame providing room for accessories
- Aluminum walk plank between machines
- Keel guard to protect the personal watercraft's hull
- Adjustable ISA (Infinite Slide Adjust) bow stop for a proper fit of any personal watercraft on the market
- Sealed LED lights on the entire trailer
- Rear retractable ratchet straps, 2 per machine
- · Swivel wheel tongue jack




- a. 16050 Aluminum diamond plate storage box for Elite WCII. 21"W x 10"H x 9"D
- b. 05031-1 Aluminum diamond plate storage box for Elite WCII. 15.5" Front x 34" Back x 18.5"H x 18.5"D
- c. 10690 Gas can tray
- d. 08519 Spare tire carrier (tire not included)














## WC2-2

- Tandem torsion axles for additional capacity and stability
- All stainless steel hardware, great for salt water use
- Tire upgrades available up to 13" tires with steel or aluminum rims (shown)
- Tough plastic molded fenders with frame supported side steps
- Adjustable ISA (Infinite Slide Adjust) bow stop for a proper fit of any personal watercraft on the market
- Aluminum walk plank between machines
- Sealed LED lights on the entire trailer
- Rear retractable ratchet straps, 2 per machine
- Swivel wheel tongue jack



Circulating grease system



### STANDARD FEATURES

#### **5 YEAR LIMITED WARRANTY**





When registered online (non-registered trailers have a one year warranty). Other vendor warranties may apply.

Visit us online at www.tritontrailers.com for full warranty details.

		WAVE	LTWCI	LTWCI-X	LTWCI-T	LTWCI-TX	LTWCII	LTWCII-X	ELITE WCII	ELITE WCIV	WC2-2
Adjustable ISA be post with non-meto properly fit cr	arring rollers		x	x	x	x	x	x	x	x	front bow stop
Adjustable carpand brackets to		5′ Bunks	x	x	x	x	x	x	x	x	x
Sealed LED light entire trailer	ts on the		x	x	x	x	x	x	x	х	х
Swivel wheel to	ngue jack			Х		х		Х	Х	х	х
Retractable ratch			-	Х		X		X	X	x	x

## **SPECIFICATIONS**

MODEL	# OF	TIDE/DIM 6	AXLE CHOICE	GVWR	CARRYING	TRAILER	OVERALL	OVERALL	HITCH	COUPLER	AXLE TYPE	BRAKES
MODEL	UNITS	03446 4.80 X 8C		1200	CAPACITY 1030	WEIGHT 170	WIDTH 55	LENGTH 145	HEIGHT 17	SIZE 2	SPRING	N/A
WAVE		06509 4.80 X 12C			1030	170	55	145	17	2	SEKING	IN/A
	1	03446 4.80 X 8C		1500	1330	170	55	145	17	2	SPRING	N/A
WAVE-H		06509 4.80 X 12C	09 4.80 X 12C									
LT WCI	1	06509 4.80 X 12C		1980	1785	195	59.5	183	17	2	SPRING	N/A
LTWCI-X		08875 ST145/R12E			1805	195	59.5	183	17	2	SPRING	N/A
		10384 ST145/R12E ALUM.										
LTWCI-T	1	06509 4.80 X 12C		1980	1770	210	59.5	183	17	2	TORSION	N/A
LIWCI-IX	LTWCI-TX	08875 ST145/R12E 10384 ST145/R12E ALUM. 03392 ST175/80D13C			1790	210	59.5	183	17	2	TORSION	N/A
		09942 ST175/80D13C ALUM.										
LT WCII	2	08875 ST145/R12E 10384 ST145/R12E ALUM.		2500	2180	320	96	176.5	16	2	SPRING	N/A
LT WCII-X												
ELITE WCII	2	07355 20.5X10E	09942 ST175/80D13C ALUM.	2700	2335	365	101.5	189	16	2	TORSION	N/A
		03392 ST175/80D13C 08875 ST145/R12E	10384 ST145/R12E ALUM.									
		SPECIAL ORDER TRAILERS - C										
WC2-2	2	03392 ST175/80D13C	09942 ST175/80D13C ALUM.	2995	2445	550	102	201	16	2	TORSION	NO
		08875 ST145/R12E	10384 ST145/R12E ALUM.									
		TRITON WC2-2 WITH SURGE	4000	3450	550	102	208	16	2	TORSION	YES	
ELITE	4	03392 ST175/80D13C	09942 ST175/80D13C ALUM.	5400	4200	1200	102	343.5	16	2	TORSION	7" Surge Disc
WCIV-SBD		08875 ST145/R12E	10384 ST145/R12E ALUM.									1 Axle Std.

Overall lengths are based on the bunks setup in the farthest position to the rear of the trailer. Hitch height is based on standard tires, upgraded tires will change loaded hitch heights. Prices and specifications may change without notice. Please note: It is the responsibility of the purchaser to adhere to the brake laws regarding trailers. For full information on the laws in your state, contact the appropriate State Motor Vehicle Department. Brake options will change the overall length of trailer. Brake option is Surge Disc Brakes on the Elite WCIV and the WC2-2 trailer. Recommended tongue weight 7-10% of GVWR.

AUTHORIZED DEALER:









Triton U.S. Patent Numbers-6,247,719 B1 6,186,580 B1 7,077,616 B2

